




## Faucet Installation Instructions

PD171




- Hole diameters are 1 1/4" minimum to 1 3/4" maximum
- Maximum deck thickness is 3 3/16" (without escutcheon and soap dispenser) or 2 11/16" (with escutcheon, without soap dispenser) or 2 5/8" (with soap dispenser)
- This kitchen faucet comes completely assembled and water tested
- Includes braided stainless steel supply lines with 1/2" IPS Inlets
- Tools required-channel lock pliers (or pipe wrench), basin wrench and small crescent wrench
- Shut off water supply prior to beginning installation



**Step 1**  
Before installation, remove white plastic quick pull-down hose. Insert escutcheon assembly (1A) from the free end of pull-down hose.

**Step 2a Three Hole Mounting**  
Screw bolts to the escutcheon. Insert escutcheon assembly through the base plate and the holes of the sink.


**Step 2b Three Hole Mounting**  
Unite black pull-down spray hose and secure spray head onto faucet spout ensuring it clicks into place. From underneath sink, slide plastic washer (2A), metal washer (2B), and threaded nut (2C) onto faucet ensuring that you pass both hot and cold water supply hoses through first followed by black pull-down spray hose. Secure by tightening threaded mounting nut (2C).



**Step 3 Single Hole Mounting**  
Unite black pull-down spray hose and secure spray head onto faucet spout ensuring it clicks into place. Insert faucet through hole in sink or countertop. From underneath sink, slide plastic washer (2A), metal washer (2B), and threaded nut (2C) onto faucet ensuring that you pass both hot and cold water supply hoses through first followed by black pull-down spray hose. Secure by tightening threaded mounting nut (2C).


**Step 4**  
Screw quick connector to the free end of pull-down hose. Align block (4A) and tabs (4B) on quick connector. Push quick connector housing firmly against to snap onto receiving hole of pull-down hose. Make sure the quick connector has been made. After connecting the hose, attach weight (4C) onto the black hose at bottom of the loop to prevent hose from twisting.

**Step 5**  
Make connections to water lines. Use 1/2" I.P.S. faucet connections (5A, not included) or use coupling nuts (5C, not included) with 3/8" O.D. braided hose (5B). Use wrenches to tighten connections. Do not over-tighten.



**Step 6**  
**Install Soap Dispenser (Optional)**  
Remove the bottle. Separate head from body assembly by holding the flange and pulling up on the dispenser head taking care not to pull directly on the spigot. Make sure the flange is properly sealed then insert body assembly through pre-drilled hole in sink and secure with nut. From underneath sink, attach soap dispenser head to assembly stalk. Fill bottle with soap from above counter then attached soap dispenser head.


**NOTE:** To refill soap bottle simply remove dispenser body and fill from above counter.



**Step 7**  
**Important:** After installation is completed, turn on hot and cold water supplies. Check for leaks. Pull the hose assembly out of the spout and remove the spray head by unscrewing it from the hose counter-clockwise. Be sure to hold the hose steady. Spray head is designed to spray hot and cold water. Flush water lines for one minute. Check for leaks. Re-tighten any connections if necessary, but do not over-tighten. Reinstall spray head by hand tightening it back onto the spray hose.

## Faucet Installation Instructions

PD171

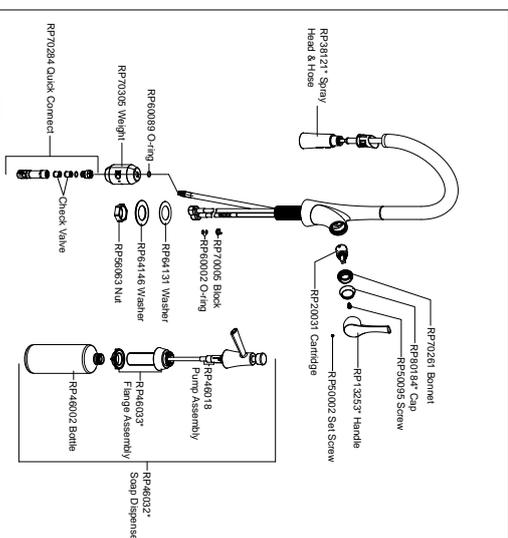

**NOTE:** This faucet is equipped with a two function sprayer plus a Pause function. Once the faucet turned off it will automatically revert back to regular aerated stream.

**Button A:** Changes flow from regular stream to full spray

**Button B:** Changes flow from full spray to regular stream.

**PAUSE:** To initiate Pause please press & hold Button B. Release when you wish to have water flow begin again.

**Parts**

Finish Codes	*Specify Finish
PC	Polish Chrome
SS	Stainless Steel PVD

**Maintenance:** Clean with warm water, soft cotton cloth and non-abrasive liquid dish soap. Towel dry. Never use acids, harsh abrasives, detergents, or products containing chlorides on any parts of this product.

# G i a g n i

For additional assistance or service call: 1-888-560-5222 USA 8:30 a.m. to 5:30 p.m. EST Monday-Friday

# G i a g n i

For additional assistance or service call: 1-888-560-5222 USA 8:30 a.m. to 5:30 p.m. EST Monday-Friday